

# D2876

MAN marine engine for heavy duty applications.

Powered by MAN.

**MAN Nutzfahrzeuge Group**



# Full speed ahead.

Typical applications for marine heavy duty operation cover passenger and goods transportation as well as escort and patrol duties at sea. MAN marine diesel engines from 258 mhp to 900 mhp perform these tasks reliably and efficiently. They meet the international current emission standards and are environmentally friendly. The worldwide service network ensures minimal maintenance effort and a customer-oriented service.

## Engine description D2876

### Characteristics

Cylinders and arrangement	6 cylinders in-line
Operation mode	watercooled 4-stroke diesel engine with exhaust turbocharger and intercooler boost pressure control with waste gate
Number of valves	2 valves per cylinder, replaceable
Fuel injection	Direct injection
Fuel system	Bosch injection pump
Engine block	High-strength casting with integrated oil and water ducts and replaceable cylinder liners
Engine lubrication	Closed system with forced feeding, oil cooling and filtering
Type of cooling	Heat exchanger with seawater pump fitted Alternatively equipment for keel cooling
Engine electric	Electronic engine monitoring
Exhaust gas status	IMO/MARPOL 73/78 97/68/EC On request: SAV and BSO for commercial application
Fuel	DMX fuel to ISO 8217, EN 590

### Dimensions D2876

		LE406	LE403	LE407
A-Overall length of engine	mm	1 565	1 565	1 565
B-Overall width of engine	mm	830	830	830
C-Overall height of engine - flat oil pan	mm	986	986	986
- deep oil pan	mm	1 064	1 064	1 064
D-Top of engine to crankshaft centre	mm	650	650	650
E-Length of engine from front end to edge of flywheel housing	mm	1 305	1 305	1 305
Average weight of engine ready for installation (dry)	kg	1 160	1 160	1 160

For detailed examinations of installation dimensions, please order drawings from our factory.

## MAN engines have outstanding qualities

- High tractive power even at low speeds
- Powerful acceleration and rapid reaction to commands
- High performance combined with low weight
- Compact, space-saving design
- Low emission values
- High efficiency owing to low fuel consumption, low running costs and long service life
- World-wide service network with rapid supply of spare parts

## Technical data D2876

Type of engine		LE406	LE403	LE407
Bore	mm	128	128	128
Stroke	mm	166	166	166
Displacement	l	12.8	12.8	12.8
Compression ratio		15.5:1	15.5:1	15.5:1
Rotation looking on flywheel		left	left	left
Flywheel housing		SAE 1	SAE 1	SAE 1
Nominal rating <sup>1</sup>	kW (mhp)	280 (381)	331 (450)	360 (490)
Rated speed	rpm	1 800	1 800	1 800
Torque at rated speed	Nm	1 485	1 756	1 915
Maximum torque	Nm	1 630	1 971	2 076
at speed	rpm	1 500	1 400	1 150
Specific fuel consumption <sup>2</sup>	g/kWh	222	223	222
Fuel consumption <sup>2</sup>	l/h	74	88	96
Classifiable		√	√	√


<sup>1</sup> The rating is according to DIN ISO 3046/1. <sup>2</sup> Consumption at rated power.

### Definition of medium duty operation

Annual operating hours	> 3 000
Percentage of time at full load	≤ 100 %
Average load application	≤ 100 %


### Typical applications

Trawlers  
Tugs and Pushboats  
Freight barges and Freighters  
Ferries  
Dredgers

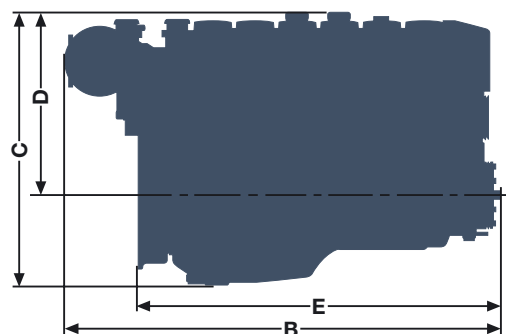


# Power charts D2876.


Power

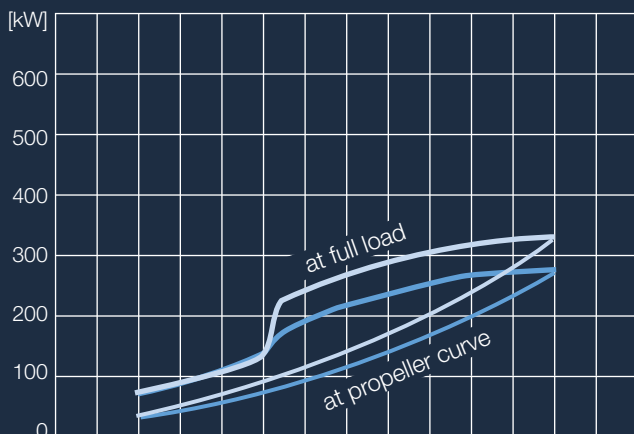


Power

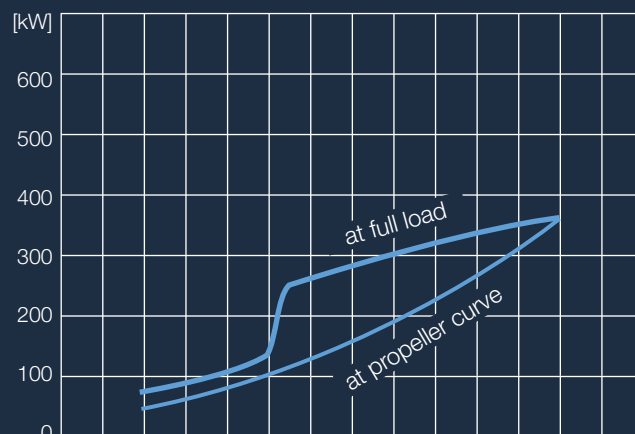


Torque

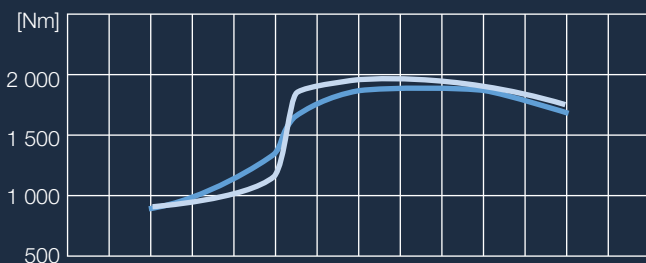


Torque

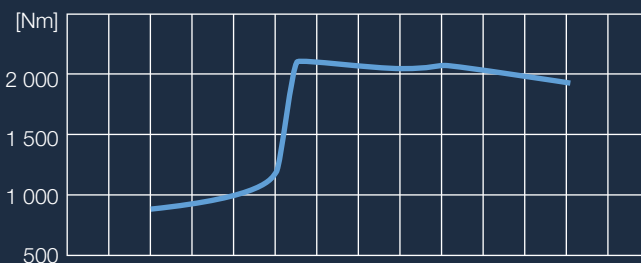

Specific fuel consumption (full load)

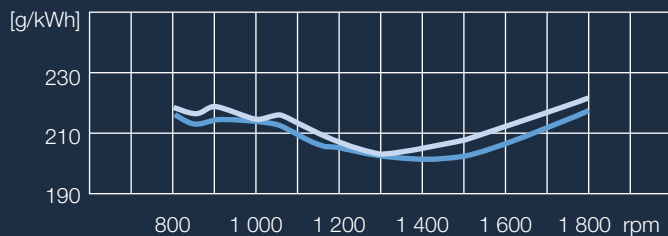

Specific fuel consumption (full load)

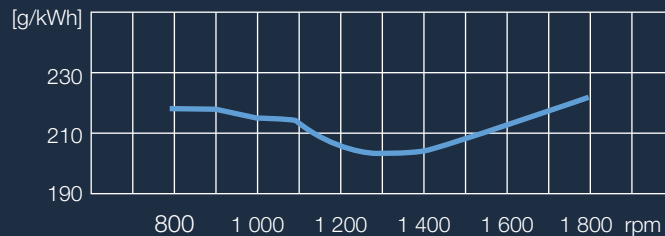

■ D 2876 LE 406 (280 kW, 1 800 rpm)

■ D 2876 LE 403 (331 kW, 1 800 rpm)

■ D 2876 LE 407 (360 kW, 1 800 rpm)

D 114.457/E · mu 03094 · Printed in Germany

Text and illustrations are not binding.

We reserve the right to make modifications in the course of technical progress.

MAN Nutzfahrzeuge AG  
Engines & Components  
Dept. SEM  
Vogelweiherstr. 33  
90441 Nuremberg, Germany

www.man-engines.com  
marinemotor@de.man-mn.com

